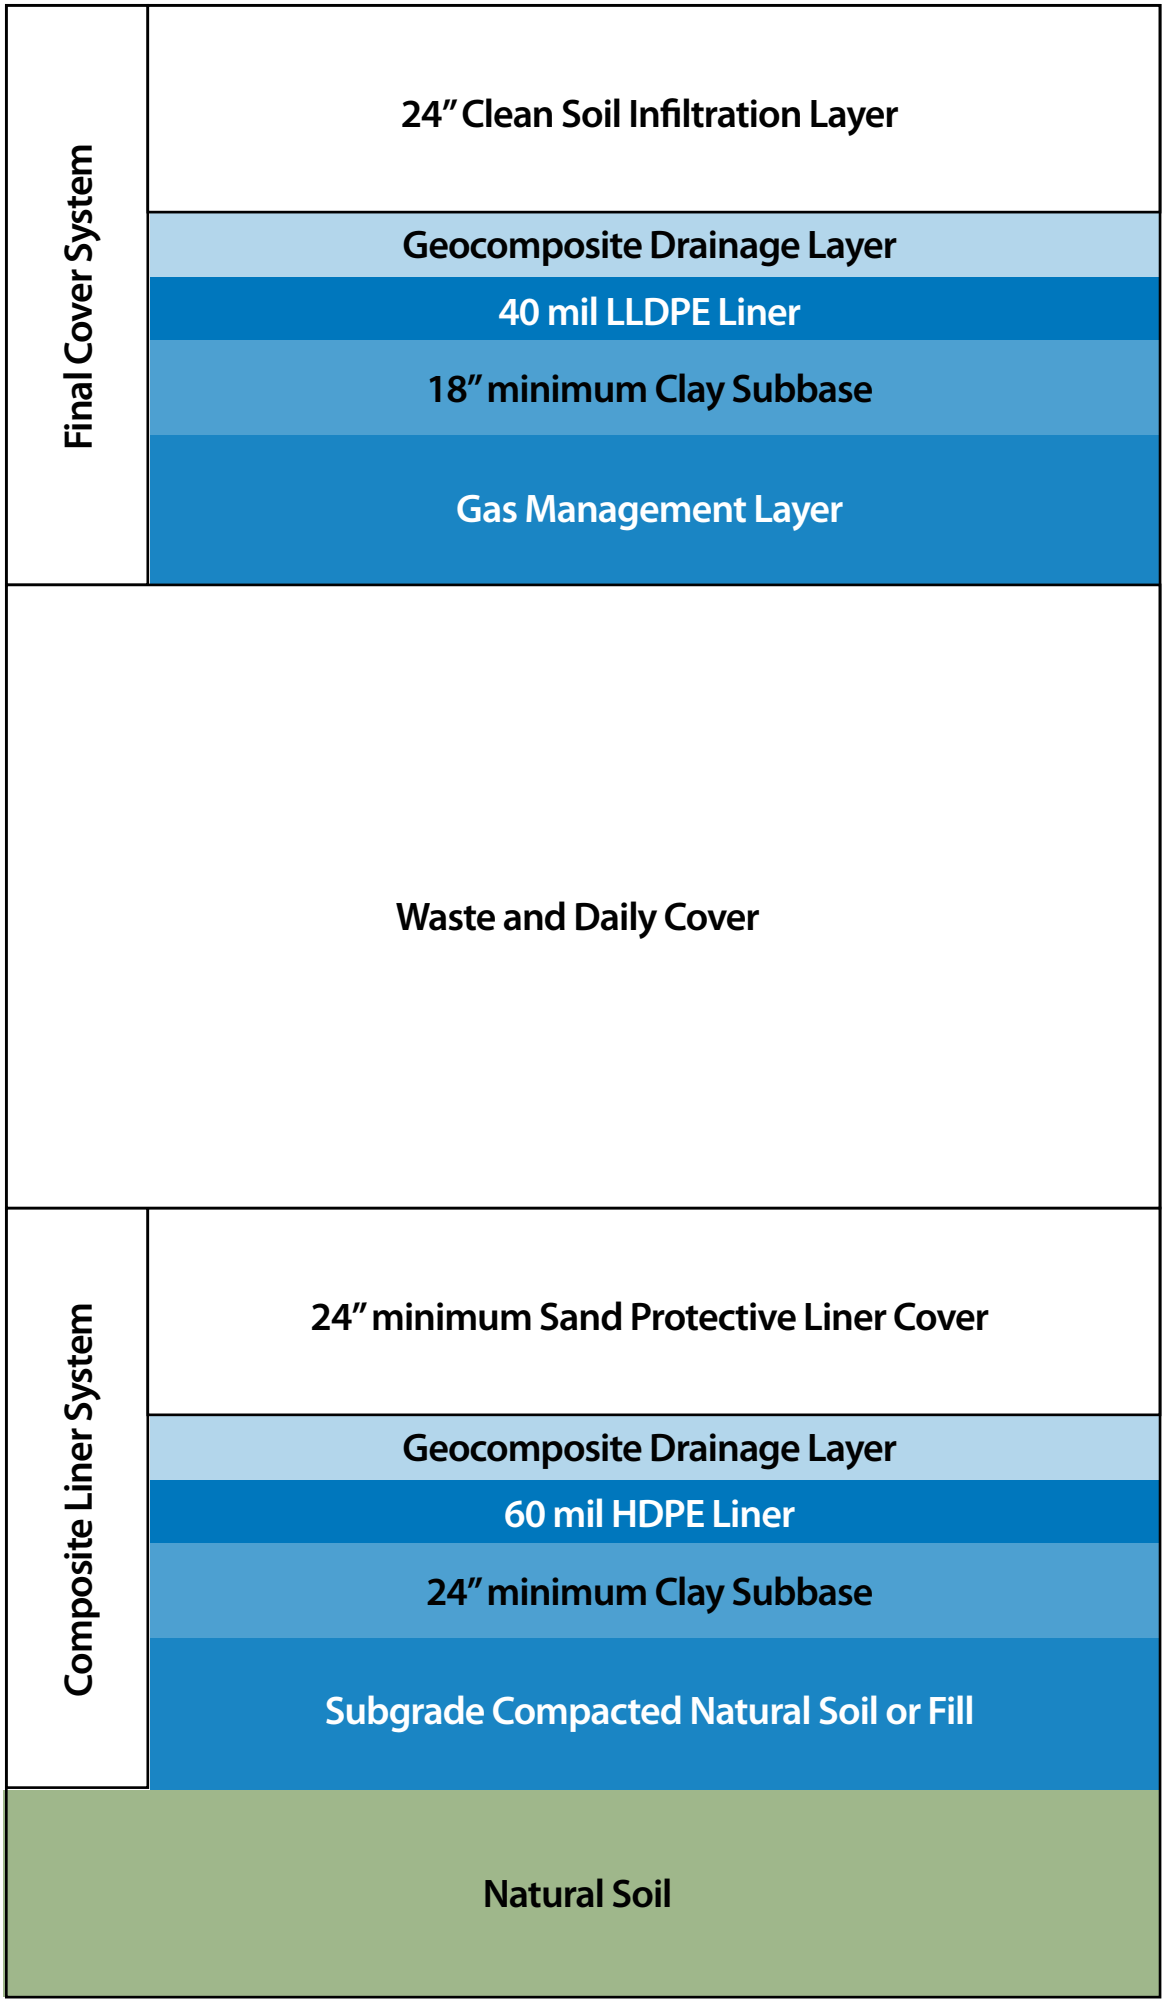
Final Cover System
24" Clean Soil Infiltration Layer
Geocomposite Drainage Layer
40 mil LLDPE Liner
18" minimum Clay Subbase
Gas Management Layer
Waste and Daily Cover
Composite Liner System
24" minimum Sand Protective Liner Cover
Geocomposite Drainage Layer
60 mil HDPE Liner
24" minimum Clay Subbase
Subgrade Compacted Natural Soil or Fill
Natural Soil